

Elektromehanički releji

Industrijski ubodni pomoćni releji

Opis:

Releji opšte namjene - novi releji se odlikuju modernim dizajnom, visokom pouzdanosti i funkcionalnosti.


Moderna tehnologija osigurava visok kvalitet i efikasnost.

- ERM2 (2 preklopna kontakta) i ERM4 (4 preklopna kontakta)
- AC špule: 24V i 230V; DC špule: 24V
- Dvije vrste postolja (M tip i T tip)
- Pribor (kratkospojnik, držač/poluga za vađenje releja, natpisna pločica, RC modul)
- Boja: siva

Karakteristike:

- Mehanički indikator sa mogućnosti zaključavanja testne tipke već u standardnoj varijanti
- Opcija: Svjetlosna indikacija (LED)
- Montaža na ploču ili na 35 mm DIN nosač u skladu sa standardom EN60715
- Poboljšana elektromagnetna efikasnost
- Dobra izolacija između kontakata (koristi se poliamid PA66)
- Kontakti ne sadrže Kadmij

Novo!

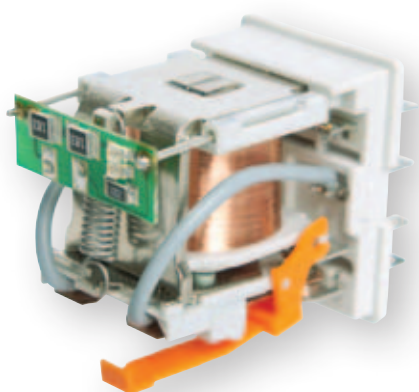

Robustan dizajn

Testne tipke

zelene - DC špule



narandžaste - AC špule




Zaštitni modul ERC

Elektromagnetni releji ERM

Držač/poluga za vađenje releja

Natpisna pločica ER-PLATE

Postolje ERB

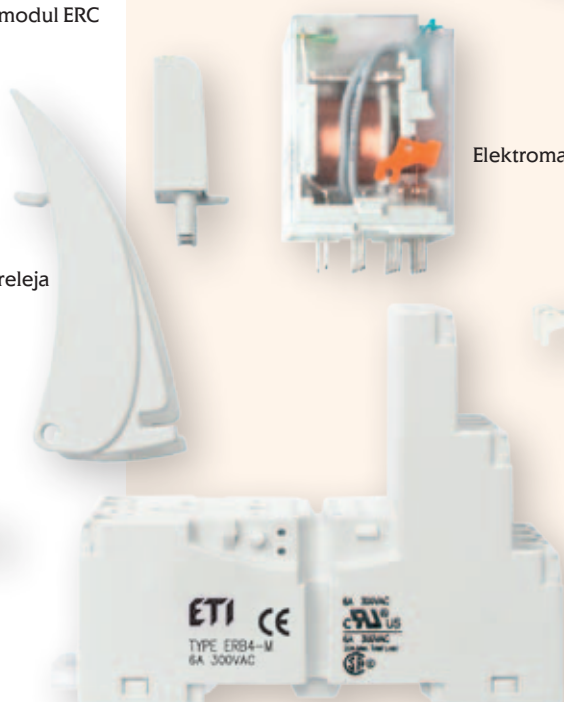

*Sve komponente moraju se naručiti odvojeno

EM ubodni releji sa mehaničkom indikacijom i testnom tipkom za zaključavanje

Tip	Šifra	U _c nazivni napon špule [V]	Broj kontakata	Težina [g]	Pakovanje [kom]
ERM4-012DC	002473021	12 V DC	4 x CO (12A, AC1)	33	10/100
ERM2-024DC	002473000	24 V DC	2 x CO (12A, AC1)	33	10/100
ERM2-024DCL	002473001	24 V DC	2 x CO (12A, AC1)	33	10/100
ERM2-024AC	002473002	24 V AC	2 x CO (12A, AC1)	33	10/100
ERM2-024ACL	002473003	24 V AC	2 x CO (12A, AC1)	33	10/100
ERM2-230AC	002473004	230 V AC	2 x CO (12A, AC1)	33	10/100
ERM2-230ACL	002473005	230 V AC	2 x CO (12A, AC1)	33	10/100
ERM4-024DC	002473006	24 V DC	4x CO (6A, AC1)	33	10/100
ERM4-024DCL	002473007	24 V DC	4x CO (6A, AC1)	33	10/100
ERM4-024AC	002473008	24 V AC	4x CO (6A, AC1)	33	10/100
ERM4-024ACL	002473009	24 V AC	4x CO (6A, AC1)	33	10/100
ERM4-230AC	002473010	230 V AC	4x CO (6A, AC1)	33	10/100
ERM4-230ACL	002473011	230 V AC	4x CO (6A, AC1)	33	10/100

*L - ugrađen LED indikator (crveni)

Primjer naručivanja

ERMX-YYYYYZ

X – Broj kontakata:

4: 4 CO (4 preklopna)

2: 2 CO (2 preklopna)

YYYYY – Šifra špule:

024AC: 24 V AC 50/60 Hz

230AC: 230 V AC 50/60 Hz

024DC: 24 V DC

012DC: 12 V DC

Z – Dodatna oprema:

L - Crvena LED indikacija

Primjer:



ERM4-024DCL - Elektromagnetni pomoćni relej za ubodno postolje sa mehaničkom indikacijom i testnom tipkom, 4 preklopna kontakta, špula 24 V DC sa svjetlosnom indikacijom.

Postolja

Tip	Šifra	Za upotrebu sa	Težina na kom [g]	Pakovanje [kom]
ERB2-T	002473012	ERM2	60	10/100
ERB2-M	002473013	ERM2	71	10/80
ERB4-T	002473014	ERM4	60	10/100
ERB4-M	002473015	ERM4	71	10/80

T - T tip

M - M tip

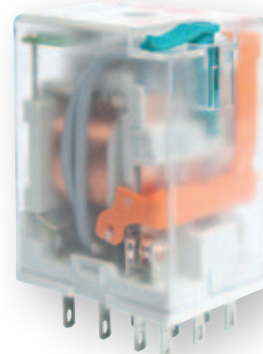

ERB2-T, ERB4-T






ERB2-M, ERB4-M

Pribor				
Tip	Šifra	Za upotrebu sa	Težina na kom [g]	Pakovanje [kom]
ER-CLIP	002473016	ERB (T tip, M tip)	4,5	10/300
ER-PLATE	002473017	ERB (T tip, M tip)	0,5	10/400
ER-TERMINAL	002473018	ERB (T tip, M tip)	1,3	2/20
ERC-024AC	002473019	ERB (T tip, M tip), U _c do 24V AC	2,6	20/100
ERC-230AC	002473020	ERB (T tip, M tip), U _c do 230V AC	2,6	20/100
ERC-024ACDCL	002473040	MERB-T & MERB-M U _c = 6 ... 24 V AC/DC	2,9	20/100
ERC-060ACDCL	002473041	MERB-T & MERB-M U _c = 24 ... 60 V AC/DC	2,9	20/100
ERC-230ACDCL	002473042	MERB-T & MERB-M U _c = 110 ... 230 V AC/DC	2,9	20/100

**ER-CLIP**

Mehaničko zaključavanje releja za postolje

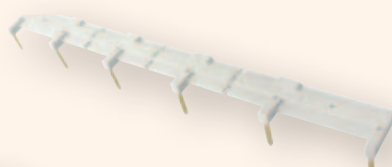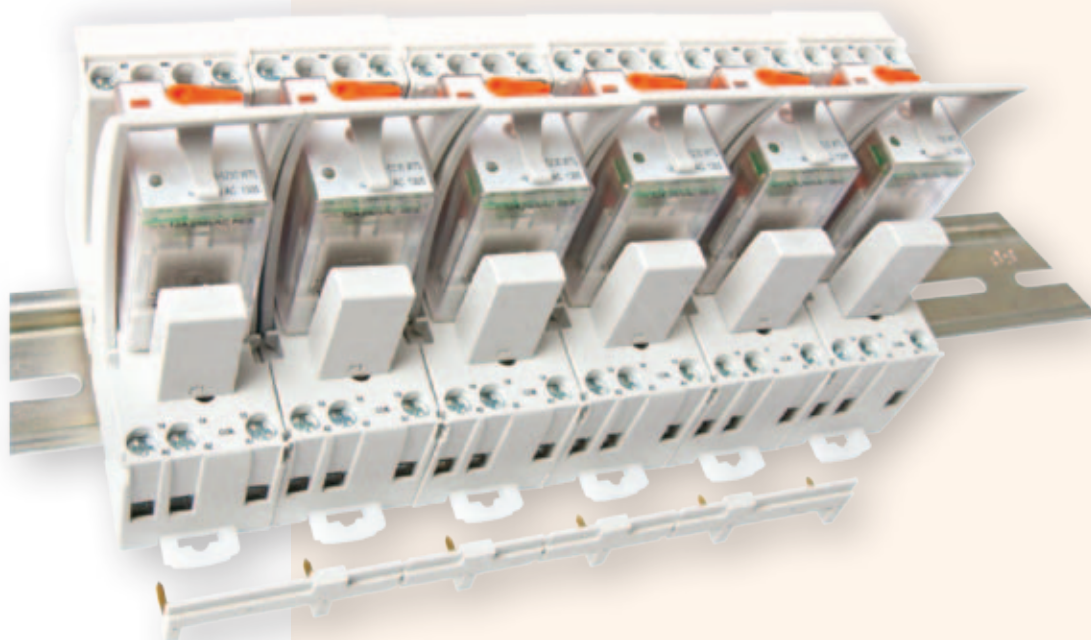**ER-PLATE**
Natpisna pločica**ER-TERMINAL**Kratko spaja zajedničke ulazne signale
(priključci A1 ili A2) do 6 releja**ERC**
Zaštitni modul**ERC-(024...230)ACDCL**
MOV zaštitni modul sa AC i DC indikacijom.

Minijaturni elektromagnetni releji

Opis

Elektromehanički releji sa dva preklopna kontakta u minijaturnom kućištu. Iako se upotrebljavaju u tiskanim pločicama PCB ili samostalno u kombinaciji sa podnožjem za montažu na DIN šinu

- MER2 (2-polni preklopni kontakt, 2x8A AC1)
- širok izbor napona upravljanja (AC napon: 24V ili 230V, DC napon: 5V, 12V, 24V)
- dva tipa utičnog podnožja (M tip i T tip)
- pribor (reza/držač relea, RC modul...)
- boja: siva

Novo!

Osobine

- bez sadržaja kadmijuma; visina 15,7mm
- 5000V/10mm ojačana izolacija
- za upotrebu u štampanim pločama PCB ili samostalno u kombinaciji sa podnožjem za montažu na DIN šinu
- za AC i DC napon
- u skladu sa standardom EN 60335-1
- u skladu sa RoHS




Minijaturni elektromagnetni rele MER



Držač/poluga za vađenje releja - MER-CLIP-PL



Natpisna pločica MER-PLATE

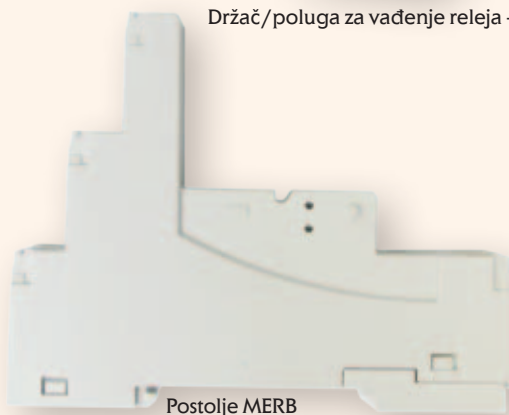

Postolje MERB



Zaštitni modul ERC

*Sve komponente moraju se naručiti odvojeno

**Minijaturni elektromagnetni releji**

Tip	Šifra	Uc nazivni napon špule [V]	Broj kontakata	Težina [g]	Pakovanje [kom]
MER2-005DC	002473030	5 V DC	2xCO (8A, AC1)	13	20/1000
MER2-012DC	002473031	12 V DC			
MER2-024DC	002473032	24 V DC			
MER2-024AC	002473033	24 V AC			
MER2-230AC	002473034	230 V AC			

Primjer naručivanja

MER2-YYYY


X – Broj kontakata:
2: 2 CO (2 preklopna)

YYYY – Šifra špule:
024AC: 24 V AC 50/60 Hz
230AC: 230 V AC 50/60 Hz
005DC: 5 V DC
012DC: 12 V DC
024DC: 24 V DC

Primjer:

MER2-024DC

Minijaturni elektromagnetni relej, 2 preklopna kontakata, špula 24 V DC.



MERB-T



MERB-M

Postolja

Tip	Šifra	Za upotrebu sa	Težina na kom [g]	Pakovanje [kom]
MERB-T	002473035	MER2	44	10/100
MERB-M	002473036			10/80

T - T Tip

M - M Tip

Elektromehanički releji

Pribor				
Tip	Šifra	Za upotrebu sa	Težina na kom [g]	Pakovanje [kom]
MER-CLIP-SP	002473037	MERB-T & MERB-M	0,3	25/400
MER-CLIP-PL	002473038		0,34	10/700
MER-PLATE	002473039			
ERC-024AC	002473019	MER2-024AC	2,6	10/200
ERC-230AC	002473020	MER2-230AC	2,9	20/100
ERC-024ACDCL	002473040	MERB-T & MERB-M $U_c = 6 \dots 24 \text{ V AC/DC}$		
ERC-060ACDCL	002473041	MERB-T & MERB-M $U_c = 24 \dots 60 \text{ V AC/DC}$		
ERC-230ACDCL	002473042	MERB-T & MERB-M $U_c = 110 \dots 230 \text{ V AC/DC}$	2,9	20/100



MER-CLIP-PL

Mehaničko zaključavanje releja za postolje, 2 tipa standardni plastični MS i tip iz žice



MER-CLIP-SP

MER-PLATE
Natpisna pločica

ERC-(024...230)ACDCL

MOV zaštitni modul sa AC i DC indikacijom.

*više podataka o ERC modulu na stranipage <HL>.

ERC
Zaštitni modul
RC filter

*više podataka o ERC modulu na stranipage <HL>.

